



**Elin**  
YOUR PARTNER BEYOND PRODUCTS



## PRODUCT CATALOG

2025



# ENGINEERING **THE FUTURE OF** TECHNOLOGY

Elin team works on ODM concept and offers Design and Development services of Domestic Kitchen Appliances, Motors, Tools & other products. With over 50 years of existence, the company offers cost-effective design solutions & supplies various finished products by utilizing an experienced team and modern software tools & infrastructure facilities.

## OUR MISSION

To provide the highest quality of customer service through Innovation, Excellence, Team work and Continuous Improvement. To have an Ethical and Sustainable impact on our Environment, Customers, Shareholders, Business Associates and the community.



## OUR VISION


To become the leading and most preferred manufacturing company in our product line.



# CONTENTS

ABOUT US	02-03		DRY IRON			
CEILING FANS			DIFG01 / DIFG02 / DIFG03 / DIFG05	24		
Model C4	05		OTG & CHIMNEY			
Model C5 / C7	06		STZ01 / STZ02 / STZ03	26		
Model C6	07		STZ04 / STZ05 / STZ06 / STZ0	27		
EXHAUST FANS			OTAC01 (ODM) / (CKD)	28		
Fresh Air Fan	08		Chimney Curved Glass / T Shape Metal	29		
Fresh Air Fan	09					
Axial Fan	10					
TPW FAN	11		OIL FILLED RADIATOR			
HAND MIXER			OFRPTC01 / OFRPTC03	31		
HMLN01 / HMLN03 / HMLN02	13		(9 Fin / 11 Fin / 13 Fin)			
MIXER GRINDER			LIGHTING			
HOMIEE / EUROPA	15		Batten	33		
MG001	16			Troffer	34	
HAND BLENDER			Tilttable Downlighter	35		
HBLN01 / HBLN02 / HBLN03	18		Deep Downlighter	36		
STEAM IRON			Slim Panel	37		
SIFG01 / SIFG02	20		Surface Panel	38		
SIAN02 / SIAN01	21			Bulk Head / Striker	39	
SIFG03	22			Linear Hanging Light	40	
			Street Light	41		
			EL Torch	42		
			EL Table Lamp	43		
			Tilttable Metal Spot DL / Downlight	44		
			Spot Light	45		

WE ARE

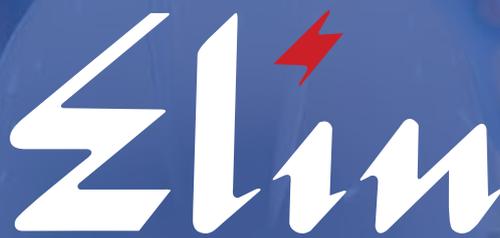

YOUR PARTNER BEYOND PRODUCTS

Elin Electronics Ltd., is an ISO 9001, ISO 14001, ISO 45000 & IATF 16949 certified company. It is a flagship company of Elin Group, promoted by the “Sethia” family. Elin was established in 1969 at DELHI / NCR.

Elin offers various products and services to its OEM customers. Elin is a one-stop solution provider, offers Electronic Manufacturing Services, BLDC and Induction Motors, Design & Manufacturing of Tools/ Moulds/Dies, Home Appliances, Personal Care Products, Fans, Lighting Products & Automotive Component

# ELIN'S INNOVATION HUB



Tool Room



EMS Facility



Press Shop



AL Diecasting



Motors



Moulding Shop



Assembly Lines



Powder Coating



Printing



Testing Lab



Coating



Metallizing

## Resources

Product Designer Mechanical	8
Product Designer Electrical	4
Product Designer Electronics	2
Project Engineers	6
Press Tool Designers	2
Mould Designers	6
Simulation Engineers	2
Technicians	8

## R & D Facilities

Ansys CFD Simulation	1
Maxwell 2D Motor design simulation	1
NX 3D design Software	12
Solid Works 3D Software	1
AutoCad 2 Software	20
Mould Wizard Mould design Software	2
Mould Flow Analysis (Autodesk)	1
Motor tester (Dyno meter)	1



Cool Comfort, Smart Performance

---

# FANS



Model **C4**

Sweep	1200 mm
Color	As per Customer requirement
Motor Type	BLDC
Winding	Copper
Remote Type / Speed	6 Speed
Rated RPM at 230V	360
Rated Watt	34 W
Air Delivery	220 CMM
Service Value	6.0 Min.
Packing	2 in 1
Product Readiness	Till Oct. End



BLDC



Model **C5 / C7**

Description	BLDC	Induction	Remark
Sweep	1200 mm	1200 mm	Alumunium Blade
Color	As per Customer requirement	As per Customer requirement	Power coated / paint
Motor Type	BLDC	Induction	-
Winding	Copper	Copper	-
Remote Type / Speed	RF / 7 Speed	6 Speed	-
Rated RPM at 230V	350	360	-
Rated Watt	34 W	52 W	-
Air Delivery	220 CMM	220 CMM	-
Service Value	6.0 Min.	4.0 Min.	-
Packing	4 in 1	4 in 1	-
Product Readiness	Till Nov. End	Till Nov. End	-



Model **C6**

Description	BLDC	Remark
Sweep	1200 mm	CRCA Blade
Color	As per Customer requirement	Power Coated
Motor Type	BLDC	-
Winding	Copper	-
Rated RPM at 230V	360	-
Rated Watt	50 W	-
Air Delivery	210 CMM	-
Service Value	4.0 Min.	-
Top / Bottom Cover	CRCA	-
Packing	4 in 1	-
Product Readiness	Till Nov. End	-



BLDC




## Fresh Air Fan

Blade Sweep	150 mm
Fan Motor	Needle winding, Single Phase Induction Motor
Insulation Class	B Class
Capacitor Rating	0.8 mfd, 440 volts, 50 Hz AC
Rated Voltage	230 V AC, 50 Hz
Rated Power Input	25 W max
Top Rating	135°C
Rated Speed at 230V	1350 RPM Min
Rated air Delivery	210 CMH min.
No. of Blades	6 Blades
Blade Material	Material - PP
Motor winding temp rise	75°C max at 245V
Product readiness	With in 20 days after confirmation



## Fresh Air Fan

Blade Sweep	200 mm	250 mm
Fan Motor	Needle winding, Single Phase Induction Motor	Needle winding, Single Phase Induction Motor
Insulation Class	B Class	B Class
Capacitor Rating	1.0 mfd, 440 volts, 50 Hz AC	1.2 mfd, 440 volts, 50 Hz AC
Rated Voltage	230 V AC, 50 Hz	230 V AC, 50 Hz
Rated Power Input	32 W max	38 W max
Top Rating	135°C	135°C
Rated Speed at 230V	1350 RPM Min	1280 RPM Min
Rated air Delivery	480 CMH min.	850 CMH min.
No. of Blades	5 Blades	5 Blades
Blade Material	Material - PP	Material - PP
Motor winding temp rise	75°C max at 245V	75°C max at 245 V
Product readiness	With in 20 days after confirmation	With in 20 days after confirmation



# Axial Fan

Sweep	100 mm	150 mm
Color	White	White
Motor type	Shaded Pole Motor	Shaded Pole Motor
Winding	Copper	Copper
Speed	Single Speed Motor	Single Speed Motor
Rated RPM at 230V	2400	2000
Rated Watt	22 W	26 W
Air Delivery	120 CMM	210 CMM
Body	PP	PP
Packing	20 in 1	20 in 1
Product Readiness	Within 20days after confirmation	Within 20days after confirmation



## TPW Fan

400 mm/16 inch

Sweep	400 mm
Color	As per Customer requirement
Motor type	Induction Motor
Winding	Copper
Speed	Three Speed Motor
Rated RPM at 230V	1650
Rated Watt	55 W
Air Delivery	70 Minimum
Body	PP
Packing	1 in 1

Perfect Mixing Every Time

---

# HAND MIXER



# Hand Mixer

Description	HMLN01 / HMLN03	HMLN02
Power	300 W	300 W
Voltage	220-240 V	220-240 V
Frequency	50/60 Hz	50/60 Hz
Speed Options	5 Speeds + Turbo	5 Speeds
Eject Button	Yes, with Safety Device	Yes, with Safety Device
Body	Polished Plastic Body	Matte Finish Plastic Body
Accessories	With Beaters and Dough Hooks	With Beaters and Dough Hooks
MOQ	11250 Pcs	11250 Pcs



\*Turbo function only works when the appliance is functioning

Precision Blending for Perfect Taste

---

# MIXER GRINDER



# Mixer Grinder

Description	Homiee	Europa
Motor Wattage / Type	750 W / 500 W Hybrid	750 W / 500 W Hybrid
Class of Appliance	Class I & Class II	Class I & Class II
Cord Wire	2 Pin / 2 Core 0.75 sq. mm 1.5m Length	3 Pin / 3 Core 0.75 sq. mm 1.5m Length
Jar Handle	ABS	ABS
Jar Lids	PC Dome Lids	PC Dome Lids
Jar Socket	Nylon 30 % GF	Nylon 30 % GF
Jar Blades	SS204	SS204
Body / Knob Material	ABS + M.B	ABS + M.B
Bottom Housing Material	PP + M.B	ABS + M.B
Packaging	Fancy & Master Box	Fancy & Master Box



Homiee

Europa

Wet Grinding – 1.5 L

Dry Grinding – 1 L

Chutney – 0.5 L



# 750 W / 500 W MG001

Motor Wattage / Type	750 W / 500 W Hybrid
Class of Appliance	Class I & Class II
Cord Wire	3 Pin / 3 Core 0.75 sq. mm 1.5m Length
Jar Handle	ABS
Jar Lids	PP / PC Lids
Jar Socket	Nylon 30 % GF
Jar Blades	SS204
Body / Knob Material	ABS
Bottom Housing Material	ABS
Packaging	Fancy Box

Wet Grinding – 1.5 L / 1.2 L

Dry Grinding – 1 L / 0.8 L

Chutney – 0.4 L / 0.5 L



Smooth Performance, Perfect Blends

---

# HAND BLENDER



# Hand Blender

Description	HBLN01 (CKD) / HBLN02 (CKD)	HBLN03 (CKD)
Power	300 W	300 W
Voltage	230 V	230 V
Frequency	50 Hz	50 Hz
Motor	Powerful and Quite DC Motor	Powerful and Quite DC Motor
Stick	Detachable Plastic Bending Rod	Detachable S / S Bending Rod
Speed Options	2 Speed Options	2 Speed + Stepless Variable Speeds
Blade	Stainless Steel	Stainless Steel
LED Light	Blue	Blue
MOQ	5000 Pcs	5000 Pcs



Smooth Finish, Every Time

# STEAM IRON



# Steam Iron

Description	SIFG01	SIFG02
Iron Type	Dry/Steam/Spray/Burst Steam	Dry/Steam/Spray/Burst Steam
Water Tank Capacity	150 ml	170 ml
Voltage	220 - 240 V	220 - 240 V
Frequency	50-60 Hz	50-60 Hz
Power	1200 W	1400 W
Soleplate Size	18x10cm	19x10.5 cm
Unit Size	23.8x10x12cm	25x10.8x12.7 cm
MOQ	10,000 Pcs & 5,000 Pcs per Colour	10,000 Pcs & 5,000 Pcs per Colour
Self-Clean	NO	NO
Steam Output	12 gm/min	15 gm/min
Power Cord Length	160 cm.	160 cm.



SIFG01

SIFG02

# Steam Iron

Description	SIAN01	SIAN02
Iron Type	Dry/Steam/Spray/Burst Steam	Dry/Steam/Spray/Burst Steam
Water Tank Capacity	320 ml	200 ml
Voltage	220 - 240 V	220 - 240 V
Frequency	50-60 Hz	50-60 Hz
Power	2200 W	1600 W
Soleplate Size	23.0x11.8cm	19.4x10 cm
Unit Size	29.8x12.8x14.6cm	25.2x10x13 cm
MOQ	5,000 Pcs	5,000 Pcs
Self-Clean	NO	NO
Steam Output	25-30 gm/min	20 gm/min
Power Cord Length	180 cm.	160 cm.



# SIFG03

Iron Type	Dry/Steam/Spray/Burst Steam
Water Tank Capacity	420 ml
Voltage	220 - 240 V
Frequency	50-60 Hz
Power	2200 W
Soleplate Size	25x12.5 cm
Unit Size	31x12.5x14.5 cm
MOQ	5,000 Pcs
Self-Clean	NO
Steam Output	25-30 gm/min
Power Cord Length	180 cm.



Smooth Performance, Crisp Results

---

# DRY IRON



# Dry Iron


Description	Creasy / Hero	Aztech DIFG03	Albatross DIFG05
Sole-plate weight (gms)	170 - 180 gms	170 - 180 gms	225 gms
Sole-plate surface area (sq inch)	23.5 inch	23.5 inch	28 inch
Sole-plate width (mm)	107 mm	107 mm	116 mm
Sole-plate length (mm)	194 mm	194 mm	213 mm
Minimum thk (mm)	2.2 mm	2.2 mm	2.7 mm
Power	1000 W / 750 W	1000 W / 750 W	1100 Watt
Sole- plate material	ADC 12	ADC 12	ADC 12
Sole- plate coating	Non-Stick - 12 microns	Non-Stick - 12 microns	Non-Stick - 25 microns
Power cord	6A, braided, 1.5 m long	6A, braided, 1.5 m long	6A, braided, 1.8m long
Heating element	Bundi tube, Incast	Bundi tube, Incast	Bundi tube, Incast
Compliance	IS 302, 366	IS 302, 366	IS 302, 366
Body	Metal Cover	Plastic	Metal Cover
Packaging	Multi-colour box	Multi-colour box	Multi-colour box

Hero DIFG02

Aztech DIFG03

Albatross DIFG05

Creasy DIFG01

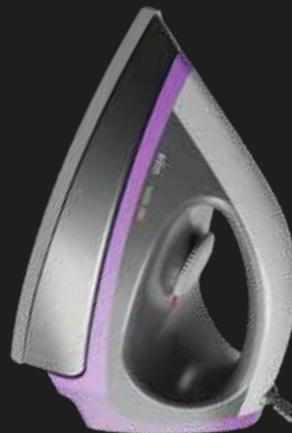



Smooth Performance, Crisp Results

---

# OTG & CHIMNEY

# Snack Toaster

Description	STZJ01 / STZJ02	STZJ03
Snack Toaster Type	Fixed plate-grill or triangle, Easy Cleaning	Detachable plate-grill or triangle
Baking Plate Coating	Non-Stick	Non-Stick
Baking Plate	Baking	Baking & Grill
Baking Plate Size	21.6 X 12.6 cm	21.6 X 12.6 cm
Baking Plate	Fixed	Detachable
Power	750 w	750 w
LED Dual Indicator	Power On & Ready	Power On & Ready
Thermostatically Controlled	Yes	Yes
MOQ	4000 Pcs	2500 Pcs
Power Cord Length	150 cm.	150 cm

STZJ01



STZJ02



STZJ03



# Snack Toaster

Description	STZJ04 / STZJ05	STZJ06 / STZJ07
Snack Toaster Type	Fixed plate-grill or triangle, Easy cleaning	Detachable plate-grill or triangle
Baking Plate Coating	Non-Stick	Non-Stick
Baking Plate	Baking & Grill	Baking & Grill
Baking Plate	Detachable	Detachable
Power	750 w	750 w
LED Dual Indicator	Power On & Ready	Power On & Ready
Thermostatically Controlled	Yes	Yes
SS Deco Plate	No	Yes
Power Cord Length	150 cm	150 cm

## STZJ04

Baking Plate Size 21.6 X 12.6 cm  
MOQ 3780 Pcs



## STZJ05

21.6 X 12.5 cm  
3780 Pcs



## STZJ06

21.6 X 12.5 cm  
4272 Pcs



## STZJ07

23 X 13 cm  
4962 Pcs



# OTAC01 (ODM) / (CKD)

Voltage	220-240V
Frequency	50/60 Hz.
Timer	60 Mins with Bell Ring
Heating Elements	4 pcs heating SS elements
Accessory	1 pc Bake Tray, 1 pc Wire Rack, 1 pc Tray/ Racy handle

## OTAC01 (ODM)



Capacity	28 litres Luxury Panel
Power	1500W
Temperature	70 - 250°C adjustable temp.

## OTAC01 (CKD)



Capacity	19/ 30/35 litres Luxury Panel
Power	1200W
Temperature	100 - 250°C adjustable temp.

# Chimney

Body Material	0.5mm cold rolled steel,matte black painting
Filter	Filter Less Chimney
Hood	Cold rolled steel 0.5mm 420mm height
Rated Input	220v-240v/50Hz
Rated Motor Wattage(W)	180W 10%
LED Light	3 W
Motor	AC150W Copper Motor/Aluminium Motor
Switch	3 speed Gesture Sensing Technology & Heat Auto Clean
Blower	Metal 210*90mm
Housing	Metal housing
Heating Films	90mm*400mm, 60W
Test Voltage	230VAC
Air Flow	F1: 600mYh min, F2: 650mYh min, F3 : 700mYh min
Power	F1 : 120w max, F2 : 135w max, F3 :
Rotate speed	F1 : 9tmtmin, F2 : F3 .
Current	F1 : 0.70A, F2 : 0.75A, F3 : 0.80A
Noise Level dB at 1M from filter	75 dB max
Temperature rise	850 max



Curved Glass & T-Shaped Metal

Smart Heating for Every Space

---

# OIL FILLED RADIATOR



9/11/13 Fins

# OFRPTC01 / OFRPTC03

Rated Voltage	230V/50Hz	Yes
Handles	Front Handle Back Handle	Yes Yes
Safety Feature	Auto TCO 150°C Manual Resettable TCO 180°C Adjustable Thermostat PTC TCO 60°C Tilt Over Switch	Yes Yes Yes Yes Yes
Cord Winder	High Gloss Finish	Yes
Caster Wheel	Easy Rotation 360°	Yes
Rear Safety Cover	Back Cover	Yes
Packing	5 Ply Colour printed with inner brown box	1x1
Fan Motor	Shaded Pole	16W
Type of Plug	3pin, 16A, 250V	Yes
Power Cord length	1650mm Min.	Yes
Power Indicator	On/Off indicator	Yes

Heating Capacity	9Fins	11 Fins/13 Fins
Low	1200 W	1400 W
Medium	1600 W	1900 W
High	2400 W	2900 W
PTC heater	400 W	400 W

Glossy Black (High temperature resistance power coating)

Glossy White (High temperature resistance power coating)




Energy Efficient Brilliance

---

# LIGHTING



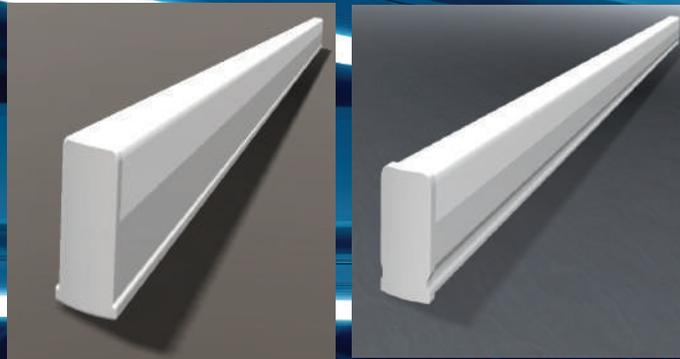

# Batten

Wattage (W)	Lumens (LM)±10%	Product Dimensions (mm)
5 W	500	296x22x31mm
10 W	1000	605x22x31mm
20 W	2000	600x22x36.5mm
20 W	2000	1097x24x33mm
22 W	2200	1097x24x33mm
25 W	2500	1097x24x33mm
30 W	3000	1097x24x33mm
36 W	3600	1097x24x33mm
25 W	2500	1178x25x36.5mm
30 W	3000	1178x25x36.5mm
36 W	3600	1178x22x36.5mm
40 W	4000	1178x22x36.5mm



100V-300V



3000K/4000K/6500K




100V-300V



130V-270V



3000K/4000K/6500K



Troffer-1x4



# Troffer

Type	Wattage (W)	Lumens (LM)± 10%	Product Dimensions (mm)
Troffer-1x1	20 W	2000	300 x 300 x 30 mm
Troffer-1x1	25 W	2500	300 x 300 x 30 mm
Troffer-2x2	30 W	3000	595 x 595 x 36 mm
Troffer-2x2	36 W	3600	595 x 595 x 36 mm
Troffer-1x4	25 W	2500	1195 x 295 x 35mm
Troffer-1x4	30 W	3000	1195 x 295 x 35mm
Troffer-1x4	36 W	3600	1195 x 295 x 35mm



## Tiltable Downlighter

Wattage (W)	Lumens (LM)± 10%	Product Dimensions (mm)	Cutout (mm)
3 W	225	75mm	300 x 300 x 30 mm
6 W	450	94mm	300 x 300 x 30 mm
9 W	720	116mm	595 x 595 x 36 mm
12 W	960	140mm	595 x 595 x 36 mm



100V-300V



3000K/4000K/6500K

# Deep Downlighter

Wattage (W)	Lumens (LM)± 10%	Product Dimensions (mm)	Cutout (mm)
12 W	960	Ø 116 mm	Ø 96 mm
18 W	1440	Ø 150 mm	Ø 127 mm



100V-300V



3000K/4000K/6500K



100V-300V



3000K/4000K/6500K

## Slim Panel

Type	Wattage (W)	Lumens (LM)± 10%	Product Dimensions (mm)	Cutout (mm)
Slim Panel RD	6 W	480	Ø 107 mm	Ø 70 mm
Slim Panel RD	9 W	720	Ø 129 mm	Ø 101 mm
Slim Panel RD	12 W	960	Ø 161 mm	Ø 133 mm
Slim Panel SQ	6 W	480	Ø 107 mm	Ø 70 mm
Slim Panel SQ	9 W	720	Ø 129 mm	Ø 101 mm
Slim Panel SQ	12 W	960	Ø 161 mm	Ø 133 mm

# Surface Panel

Type	Wattage (W)	Lumens (LM)± 10%	Product Dimensions (mm)
Rimless Surface Panel RD + SQ	6 W	480	90X27mm
Rimless Surface Panel RD + SQ	12 W	960	120X27mm
Rimless Surface Panel RD + SQ	18 W	1440	155X27mm



100V-300V



3000K/4000K/6500K

Bulk Head



Striker



## Bulk Head

Wattage (W)	Lumens (LM)± 10%	Voltage (V)	Product Dimensions (mm)
10 W	800	100V-300V	167X78X61 mm

## Striker

Wattage (W)	Lumens (LM)± 10%	Voltage (V)	Product Dimensions (mm)
4 W	320	100V-300 V	69X14 mm



3000K/4000K/6500K




100V-300V



4000K/6500K

# Linear Hanging Light

Type	Wattage (W)	Lumens (LM)± 10%	Product Dimensions (mm)
Hexagon Profile Ceiling Light	45W	4500	800x65x740mm
Linear Ceiling Light Round-450mm	20W	2000	450x65x55mm
Linear Ceiling Light Round-600mm	30W	3000	600x65x55mm
Linear Ceiling Light Round-850mm	60W	6000	850x65x55mm
Linear Ceiling Light Round-1200mm	80W	8000	1200x65x55mm
S Profile Ceiling Light	22W	2200	1165x65x350mm
Linear Ceiling Light 4ft	20W	2000	1200x65x53mm

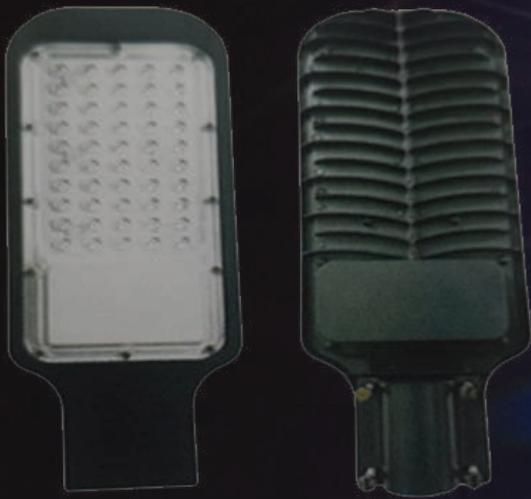

# Streetlight

Wattage (W)	CCT (K)	Lumens (LM)± 10%	Product Dimensions (mm)
20W	6500K	2000	275x103x38 mm
25W	6500K	2500	300x103x39 mm
30W	6500K	3000	340x124x38 mm
50W	6500K	5000	390x145x40 mm
100W	6500K	10000	450x171x48 mm



130V-300V

# Eltorch

Wattage (W)	LED	Capacity	Product Dimensions (cm)
3 W	3 Watt Led	1x1200mAh	42.8x26.7x35.6 cm
5 W	5 Watt Led	2x1200mAh	50.0x31.2x51.2 cm



# El Table Lamp

Wattage (W)	LED	Capacity	Product Dimensions (cm)
3.6 W	18x0.2 W Led	2x1200mAh	56.7x48.0x56.0 cm
3 W	15x0.2 W Led	1x1200mAh	44.2x41.5x62.6 cm
3 W	39x0.2 W Led	2x1200mAh	64.7x35.1x50.0 cm



Tiltable Metal Spot DL

Downlight

# Tiltable Metal Spot DL

Wattage (W)	Lumens (LM)±10%	Product Dimensions (mm)	Cutout (mm)
7W	560	78x55mm	Ø 70mm
12W	960	98x65mm	Ø 90mm
18W	1440	115x75mm	Ø 105mm

# Downlight

Wattage (W)	Lumens (LM)± 10%	Product Dimensions (mm)	Cutout (mm)
5 W	400	Ø 109X27 mm	Ø 76 mm
7 W	560	Ø 109X27 mm	Ø 76 mm



100V-300V



3000K/4000K/6500K



# Spotlight

Type	Wattage (W)	Lumens (LM)± 10%	Product Dimensions (mm)
Surface Spotlight	12 W	960	84X96 mm
Spotlight	8 W	640	50X175 mm



100V-300V



3000K/4000K/6500K



YOUR PARTNER BEYOND PRODUCTS

DELHI – (Registered & Corporate office)

ELIN HOUSE

4771, Bharatram Road, 23, Daryaganj, New Delhi-110002, India



Fax: 91-011-23289340

+91-011-43000400

Email: [cs@elinindia.com](mailto:cs@elinindia.com)

[www.elinindia.com](http://www.elinindia.com)